

PRZETOK A-A

The drawing shows two views of a mechanical assembly:


- Front View (Left):** Shows a rectangular plate (NR 6) with rounded corners (R24). It features four mounting holes (NR 7) at the corners. The overall width is 150 mm and height is 130 mm. There are two raised edges (NR 2) on the bottom edge, each 50 mm wide and 10 mm high. The distance between the centers of the raised edges is 120 mm.
- Side View (Right):** Shows the profile of the assembly. It includes a central vertical rod (NR 4) passing through a hole in the plate (NR 6). The rod has a diameter of Ø36 mm. The plate thickness is 10 mm. The distance from the center of the rod to the nearest corner hole is 80 mm. The total width of the plate is 150 mm.

NR POZ.	ILOŚĆ [szt.]
1	1
2	1
3	1
4	1
5	1
6	4
7	4

WYKONANO

NR POZ.	ILOŚĆ [szt.]	PRZEKRÓJ [mm]	DŁUGOŚĆ 1 poz. [mm]	MASA [kg]			MATERIAŁ
				1 mb	1 poz.	razem	
1	1	∅ 160*10	160	12,56	2,01	2,01	St3SX
2	1	∅ 140*10	140	10,99	1,54	1,54	St3SX
3	1	Śruba M20	50	-	0,18	0,18	kl 4.8
4	1	Podkładka d _s =21	-	-	0,02	0,02	St3SX
5	1	Tuleja Ø36mm	40	7,99	0,32	0,32	St3SX
6	4	Pręt gładki Ø12mm	507	0,888	0,45	1,80	St3SX
7	4	Pręt gładki Ø12mm	320	0,888	0,28	1,14	St3SX
		Dodatek na spoiny	1,80%			0,13	
MASA OGÓŁEM kg							7,14
WYKONAĆ 34 KOTWY TALERZOWE				7,14 kg x 34 szt. = 242,8 kg			

1. Wszystkie wymiary podano w [mm]

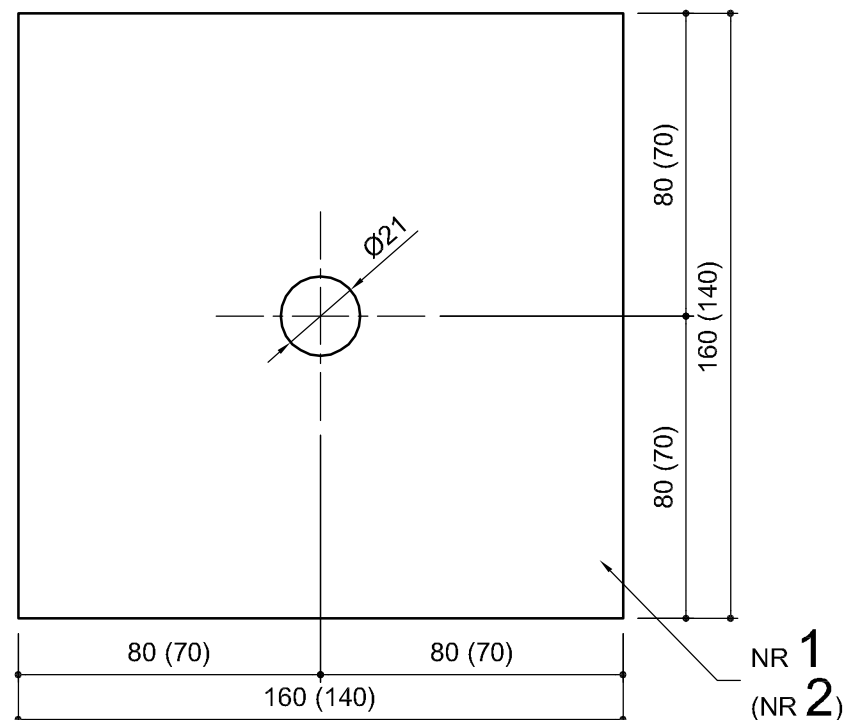

Pl. Mickiewicza 1
47-420 Kuźnia Raciborska
[http:// www.asx-bud.pl](http://www.asx-bud.pl)
E-mail: biuro@asx-bud.pl

Gmina Woźniki
Rynek 11
42-289 Woźniki

Przebudowa mostu przy ul. Modrzewiowej w Woźnikach

Most drogowy w ciągu drogi gminnej - ul. Modrzewiowej
w m. Woźniki na działce o nr ewid. 180a, obręb 0005 Woźniki

asx-02/2021

PT

KOTEW TALERZOWA

mgr inż. Sławomir Żołyński upr. mostowe SLK/1385/POOM/06

10.2021 r.

mgr inż. Sławomir Żołyński upr. mostowe SLK/1385/POOM/06

1:2

mgr inż. Marcin Siwiec upr. mostowe SLK/4860/POOM/14

12